


ATTENTION: PLUMBERS AND DEMOLITION CONTRACTORS
THE BUFFALO SEWER AUTHORITY (BSA) REQUIRES THAT ALL SEWER LATERAL ABANDONMENTS BE PERFORMED AS DESCRIBED BELOW, WHERE PRACTICABLE. PLEASE CONTACT THE BSA TO DISCUSS ANY CHANGES OR MODIFICATIONS PRIOR TO COMMENCING WORK.



NOTE(S):

WHEN ABANDONING SEWER LATERAL CONNECTION(S) TO THE PUBLIC SEWER, CONTRACTOR SHALL CUT AND REMOVE THE DRAINAGE PIPE TO WITHIN TWO FEET OF THE MAIN SEWER, WHERE PRACTICABLE. THE PIPE FROM THE CUT TO THE MAIN SEWER SHALL NOT BE DAMAGED IN ANY MANNER BY THE CONTRACTOR. IF THE EXISTING LATERAL IS DAMAGED BY THE CONTRACTOR, THE LATERAL MAIN SHALL BE FIXED IN A MANNER ACCEPTABLE TO THE BUFFALO SEWER AUTHORITY (BSA) AND THE ENGINEER AT NO COST TO THE BSA. ONCE THE LATERAL HAS BEEN CUT, THE LATERAL SHALL BE PLUGGED WITH A MECHANICAL PLUG (GRAHAM HAND - TITE PLUG OR EQUAL) THAT IS ACCEPTABLE TO THE BSA AND THE ENGINEER. THE PLUG IS TO BE INSTALLED A MINIMUM OF ONE (1) FOOT DEEP INTO THE LATERAL AND CONTROLLED LOW STRENGTH MATERIAL (CLSM) SHALL BE PLACED WITHIN THE ENTIRE DIAMETER OF THE PIPE FOR ONE (1) LINEAR FOOT. THE REMAINING PIPE SHALL BE REMOVED AND PROPERLY DISPOSED OF OR ABANDONED IN PLACE AND FILLED WITH CLSM (OR FLOWABLE FILL).

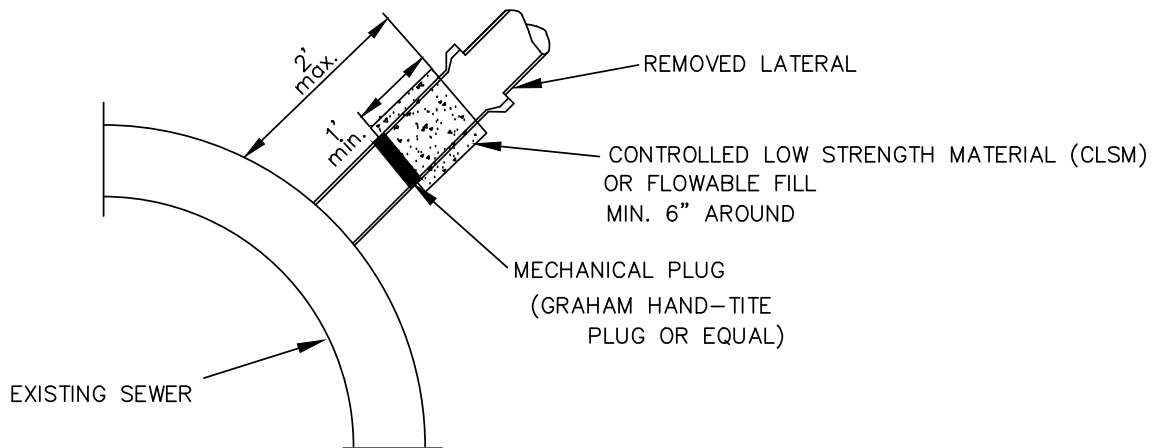

SEWER LATERAL ABANDONMENT DETAIL

N.T.S